


技術資料

軟質雲母片

UL Cat. No. SM61 & 8M81

P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.
Telephone : (852) 2604-8222 * Facsimile : (852) 2693-2093
E-mail : sales@pleo.com * Web Site : http://www.pleo.com

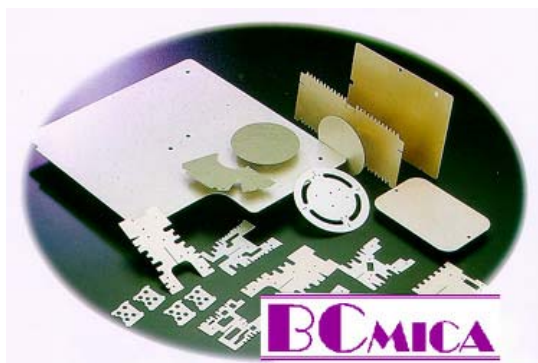

UL FILE #E222948

描述： SM61 & 8M81 是一種軟質雲母片，又稱上膠雲母紙，在室溫下具有良好彈性和柔韌性，根據需要可捲曲成各種形狀。它是由矽及雲母板經特殊配方的有機矽樹脂複合而成，通過 UL94V-0 測試, RTI 200 °C; 并取得 UL 認證，檔案號 E222948。被廣泛用于 H 級、C 級、R 級、S 級的高壓變壓器、工業爐及家用電器上的絕緣。

應用： SM61 & 8M81 可以纏繞或包裹無需加熱，可被用作覆蓋片、分隔片、絕緣片或者耐高溫密封材料。通常使用場合如熱風槍、吹風機、暖風機、斷路器、變壓器、電爐、發電機及電磁綫圈絕緣等。

- 特性：**
- 優異的耐熱性可達 1000 °C.
 - 優良的電子絕緣.
 - 優良的抗拉強度和在室溫下容易成形.

技術資料：	單位	SM61 /8M81	SM61P/8M81P
雲母紙		銀白色	金色
雲母紙厚度	mm	0.15 –3.0	0.15-3.0
厚度公差	mm	± 10%	± 10%
密度	g/cm ³	ca. 2.0	ca. 2.0
雲母含量	%	>ca. 90	>ca. 90
矽含量	%	<ca. 90	<ca. 90
電氣強度	kV/mm	>20	>20
耐溫等級			
持續使用環境	°C	500	700
間歇工作環境	°C	800	1000
在 500°C 的熱失重	%	<1	<1
在 700°C 的熱失重	%	<2	<2
紙張尺寸	mm	1000x600 / 1000x1200 / 1000x2400	

*測試程式 IEC 371-2



BCtape™ Pbobbin® BCwire® BCmica® BCtube® is P. Leo & Co., Ltd. registered trade mark

Important Notice to Purchase

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or *he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.